


WP 25/48

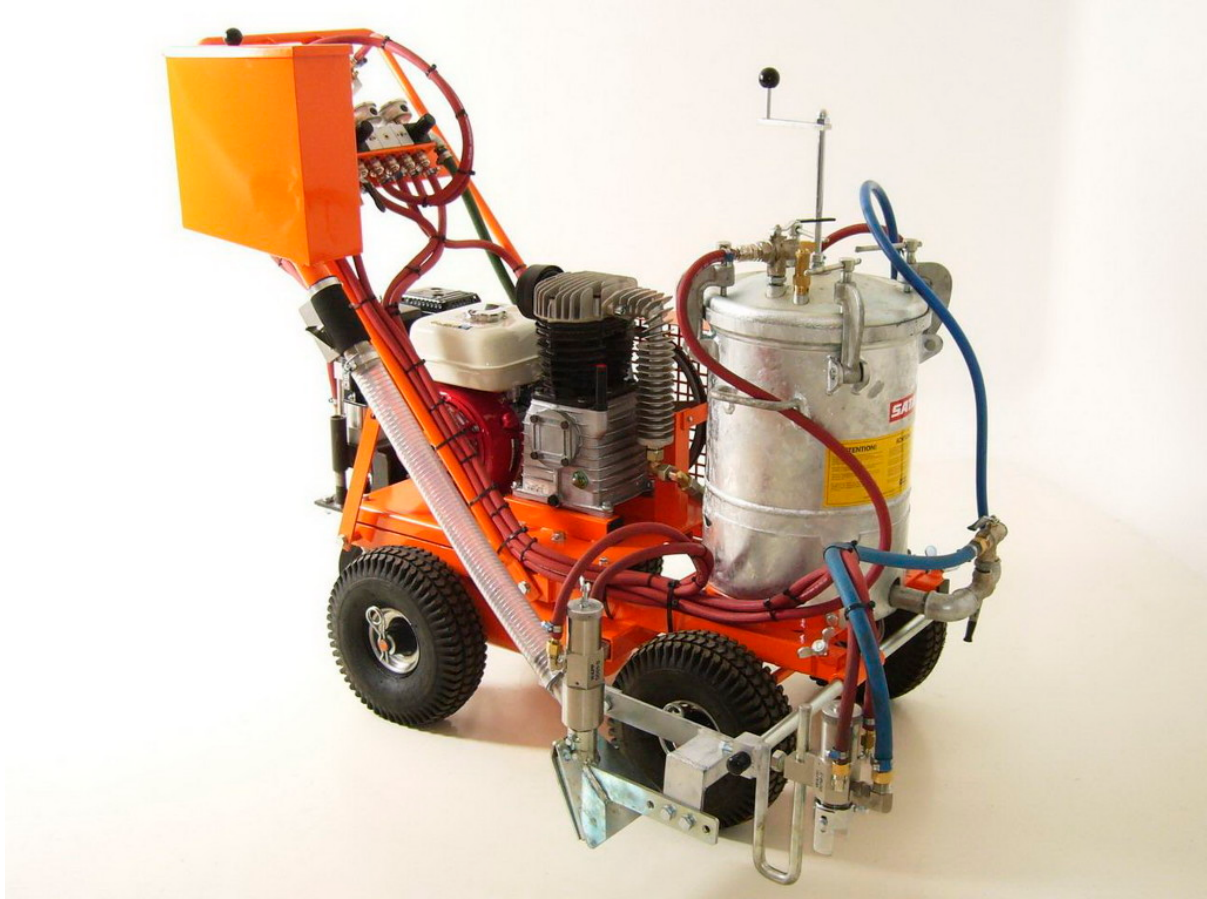

Hand-guided road marking machine

WP 25/48

Machine Type	Hand-guided road marking machine WP 25/48
Engine	Honda-GX 160, 5,5 hp (4kW)
Fuel	gasoline
Electrical system	12 V, on request battery 16 Ah, e-start
Steering	swivel wheel, pneumatically switchable by cylinder
Wheels	4 pneumatic wheels, d=300 mm, 4 PR
Compressor	2-cylinder, effective air supply 360 ltr./min
Operating air pressure	6 bar, silenced safety valve
Paint pressure tank	24 litres, on request 48 or 65 litres, with agitator
Marker unit	discless marker unit as standard up to 15 cm line width, on request with rolling discs marker unit up to 30 cm line width
Additional equipment	hand held spray gun with 6 or 10m hosing, glass bead equipment with 11 ltr. bead tank, bead gun 10-30 cm dispensing width
Empty weight	approx. 120 kg
Dimensions Length x width x height	approx. 1,70 m x 1,00m x 1,00 m

Technical modifications and errors excepted,
illustrations similar resp. partly including special accessories.

State of art: 01.11.2014_en